

Page -----2

Page -----3



Page -----4



Page -----5





MADE IN
Türkiye



WHY U.S ?

Expertise : We are an experienced team in our field and we follow industry trends closely.
Customer Focus : We offer solutions specific to your needs.
Global Network: We have a wide international business network.

KEREM FOREIGN TRADE & CONSULTANCY

The foundations of our company were laid in 1968 in the Karaköy district of Istanbul. ÜNVER HIRDAVAT KOLL.ŞTİ. Our company, which started its activities under the name FIRAT HIRDAVAT MAKİNA VE GIDA SANAYİ LTD.ŞTİ. in 2004. In 2020, our company continues its activities under the name KEREM DIŞ TİCARET VE DANIŞMANLIK İLHAMİ ÜNVER. During this process, it has become a solution partner to its customers in many sectors both at home and abroad.

While PROKEYY's registered brand is the key to a reliable solution for its customers with its experienced team, it has adopted the mission that our customers are our bosses and adding quality and value is our job.

With 55 years of experience and the main source of trust, our company provides services in the fields we have specified in the sectors section of our website. It also acts as a sales partner for products from many sectors produced in Türkiye. We provide consultancy services to companies in various sectors from many countries around the world. We offer professional Private Label solutions based on programmed technology at every stage from design to end use for all kinds of products in all sectors. We accept our customers' demands as our own products, research them with sensitivity and offer alternative solutions without compromising on quality.

OUR MISSION

OUR CUSTOMERS ARE OUR BOSSES, ADDING QUALITY AND VALUE IS OUR JOB.

Our aim is to introduce and make available to the world all products in all sectors that can be produced in our trust-oriented Turkey with our experienced team. To be the key to solution with sensitivity and transparency to our business partners.

BEST REGARDS

POURQUOI NOUS ?

Expertise : Nous sommes une équipe expérimentée dans notre domaine et nous suivons de près les tendances de l'industrie.
Orientation client : Nous proposons des solutions spécifiques à vos besoins.
Réseau mondial : Nous disposons d'un vaste réseau commercial international.

KEREM COMMERCE EXTÉRIEUR ET CONSEIL

Les fondations de notre entreprise ont été posées en 1968 dans le quartier de Karaköy à Istanbul. Notre société, qui a démarré ses activités sous le nom de FIRAT HIRDAVAT MAKİNA VE GIDA SANAYİ LTD.ŞTİ en 2004. En 2020, notre société poursuit ses activités sous le nom de KEREM DIŞ TİCARET VE DANIŞMANLIK İLHAMİ ÜNVER. Au cours de ce processus, elle est devenue un partenaire de solutions pour ses clients dans de nombreux secteurs, tant en Allemagne qu'à l'étranger.

Bien que la marque déposée PROKEYY soit la clé d'une solution fiable pour ses clients avec son équipe expérimentée, elle a adopté la mission selon laquelle nos clients sont nos patrons et ajouter de la qualité et de la valeur est notre travail.

Forte de 55 ans d'expérience et principale source de confiance, notre entreprise propose des services dans les domaines que nous avons précisés dans la section secteurs de notre site Internet. Elle agit également en tant que partenaire commercial pour les produits de nombreux secteurs fabriqués en Turquie. Nous fournissons des services de conseil à des entreprises de divers secteurs dans de nombreux pays du monde. Nous proposons des solutions professionnelles de marque privée basées sur une technologie programmée à chaque étape, de la conception à l'utilisation finale, pour toutes sortes de produits dans tous les secteurs. Nous acceptons les demandes de nos clients comme notre propre produit, les recherchons avec sensibilité et proposons des solutions alternatives sans compromettre la qualité.






NOTRE MISSION


NOS CLIENTS SONT NOS PATRONS, AJOUTER DE LA QUALITÉ ET DE LA VALEUR EST NOTRE MÉTIER.

Notre objectif est de présenter et de mettre à la disposition du monde tous les produits dans tous les secteurs qui peuvent être fabriqués dans notre Turquie axée sur la confiance avec notre équipe expérimentée. Être la clé de la solution avec sensibilité et transparence envers nos partenaires commerciaux.

SALUTATIONS


Chain Slings Load (Safety) Chart









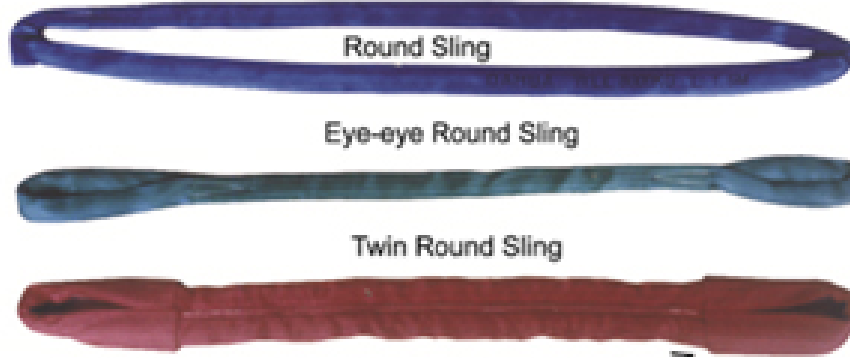


MAX WLL FOR VIS GR.10 AND CLASSIC GR.8 CHAIN SLINGS ACCORDING TO EN 818-1,2,4 MAX. ZUL. TRAGFÄHIGKEIT FÜR VIS GR.10 UND CLASSIC GR.8 KETTENGHÄNGE GEMÄß EN 818-1,2,4									
SAFETY FACTOR // SICHERHEITSAKTOR		1 LEG // 1-STRANG	2 LEGS // 2-STRANG		3 OR 4 LEGS // 3 ODER 4 STRANG		CHOKER ENDLESS SLING // ENDLOS KETTE	BASKET SLING // RUNDSCHLINGE	
4									
Load factor Tragfähigkeitsfaktor		1	1,4	1	2,1	1,5	1,6	1,4	2,1
d mm	Gr.	WLL max t							
6	10	1,4	2	1,4	3	2,12	2,24	2	3
	8	1,12	1,6	1,12	2,36	1,7	1,8	1,6	2,36
7	10	1,9	2,65	1,9	4	2,8	3	2,65	4
	8	1,5	2,12	1,5	3,15	2,24	2,5	2,12	3,15
8	10	2,5	3,55	2,5	5,3	3,75	4	3,55	5,3
	8	2	2,8	2	4,25	3	3,15	2,8	4,25
10	10	4	5,6	4	8,4	6	6,3	5,6	8
	8	3,15	4,25	3,15	6,7	4,75	5	4,25	6,7
13	10	6,7	9,5	6,7	14	10	10,6	9,5	14
	8	5,3	7,5	5,3	11,2	8	8,5	7,5	11,2
16	10	10	14	10	21,2	15	16	14	21,2
	8	8	11,2	8	17	11,8	12,5	11,2	17
18	8	10	14	10	21,2	15	16	14	21,2
19	10	14	20	14	30	21,2	22,4	20	30
	8	11,2	16	11,2	23,6	17	18	16	23,6
20	10	16	22,4	16	33,6	24	25,6	22,4	33,6
	8	12,5	17	12,5	26,5	19	20	17	26,5
22	10	19	26,5	19	40	28	30	26,5	40
	8	15	21,2	15	31,5	22,4	23,6	21,2	31,5
26	10	26,5	37,5	26,5	56	40	42,5	37,5	56
	8	21,2	30	21,2	45	31,5	33,5	30	45
32	8	31,5	45	31,5	67	47,5	50	45	67




In case of asymmetric loading, the chain sling shall be rated at 50% the marked WLL
Im Falle einer asymmetrischen Ladung, sollte das Kettengehänge mit 50% der zulässigen markierten Tragfähigkeit bemessen werden



Working Load Limit Of Synthetic Round Sling



Color code	WLL (t)	SWL WLL (t) M CC							Double Multi -set SWL(t)			
												
VIOLET	1.0	1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.4	1.1	1.0	0.8
GREEN	2.0	2.0	1.6	4.0	2.8	2.0	1.4	1.0	2.8	2.2	2.0	1.6
YELLOW	3.0	3.0	2.4	6.0	4.2	3.0	2.1	1.5	4.2	3.4	3.0	2.4
GREY	4.0	4.0	3.2	8.0	5.6	4.0	2.8	2.0	5.6	4.5	4.0	3.2
RED	5.0	5.0	4.0	10.0	7.0	5.0	3.5	2.5	7.0	5.6	5.0	4.0
BROWN	6.0	6.0	5.0	12.0	8.4	6.0	4.2	3.0	8.4	6.7	6.0	5.0
BLUE	8.0	8.0	6.0	16.0	11.2	8.0	5.6	4.0	11.2	9.0	8.0	6.0
ORANGE	10	10.0	8.0	20.0	14.0	10.0	7.0	5.0	14.0	11.2	10.0	8.0
ORANGE	15	15.0	12.0	30.0	21.0	15.0	10.5	7.5	21.0	16.8	15.0	12.0
ORANGE	20	20.0	16.0	40.0	28.0	20.0	14.0	10.0	28.0	22.4	20.0	16.0
ORANGE	30	30.0	24.0	60.0	42.0	30.0	21.0	15.0	42.0	33.6	30.0	24.0
ORANGE	50	50.0	40.0	100.0	70.0	50.0	35.0	25.0	70.0	56.0	50.0	40.0
ORANGE	80	80.0	64.0	160.0	112.0	80.0	56.0	40.0	112.0	89.6	80.0	64.0
ORANGE	100	100.0	80.0	200.0	140.0	100.0	70.0	50.0	140.0	112.0	100.0	80.0

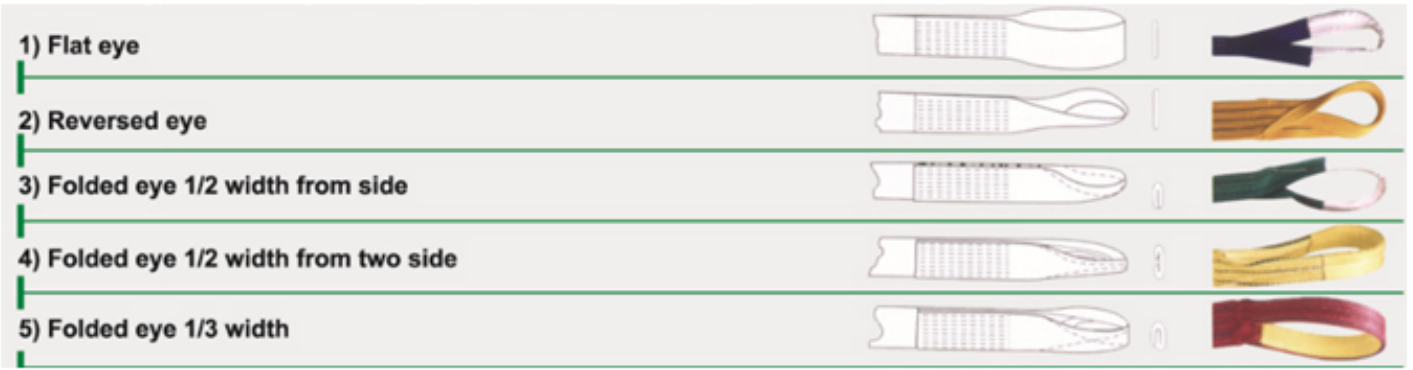
Safe Working Load Table Of Flat Polyester Slings



FLAT POLYESTER SLINGS TO BS EN 1492-1, ASME B 30.9 (SAFE WORKING LOAD TABLE)				VERTICAL	CHOKE	BASKET			
									100%
				100%	80%	200%	140%	100%	
		SWL/WLL	WIDTH	COLOUR	SWL/WLL IN KG AT DIFFERENT MODES				
FLAT POLYESTER WEBBING SLING SINGLE PLY									
	0.5t	1"	VIOLET	500	400	1000	700	500	
	1t	2"	GREEN	1000	800	2000	1400	1000	
	1.5t	3"	YELLOW	1500	1200	3000	2100	1500	
	2t	4"	GREY	2000	1600	4000	2800	2000	
	2.5t	5"	RED	2500	2000	5000	3500	2500	
	3t	6"	BROWN	3000	2400	6000	4200	3000	
	4t	8"	BLUE	4000	3200	8000	5600	4000	
	5t	10"	ORANGE	5000	4000	10000	7000	5000	
	6t	12"	ORANGE	6000	4800	12000	8400	6000	
FLAT POLYESTER WEBBING SLING DOUBLE PLY									
	1t	1"	VIOLET	1000	800	2000	1400	1000	
	2t	2"	GREEN	2000	1600	4000	2800	2000	
	3t	3"	YELLOW	3000	2400	6000	4200	3000	
	4t	4"	GREY	4000	3200	8000	5600	4000	
	5t	5"	RED	5000	4000	10000	7000	5000	
	6t	6"	BROWN	6000	4800	12000	8400	6000	
	8t	8"	BLUE	8000	6400	16000	11200	8000	
	10t	10"	ORANGE	10000	8000	20000	14000	10000	
	12t	12"	ORANGE	12000	9600	24000	16800	12000	
FLAT POLYESTER WEBBING SLING TRIPLE PLY									
	1.5t	1"	VIOLET	1500	1200	3000	2100	1500	
	3t	2"	GREEN	3000	2400	6000	4200	3000	
	4.5t	3"	YELLOW	4500	3600	9000	6300	4500	
	6t	4"	GREY	6000	4800	12000	8400	6000	
	7.5t	5"	RED	7500	6000	15000	10500	7500	
	9t	6"	BROWN	9000	7200	18000	12600	9000	
	12t	8"	BLUE	12000	9600	24000	16800	12000	
	15t	10"	ORANGE	15000	12000	30000	21000	15000	
	18t	12"	ORANGE	18000	14400	36000	25200	18000	
FLAT POLYESTER WEBBING SLING FOUR PLY									
	2t	1"	VIOLET	2000	1600	4000	2800	2000	
	4t	2"	GREEN	4000	3200	8000	5600	4000	
	6t	3"	YELLOW	6000	4800	12000	8400	6000	
	8t	4"	GREY	8000	6400	16000	11200	8000	
	10t	5"	RED	10000	8000	20000	14000	10000	
	12t	6"	BROWN	12000	9600	24000	16800	12000	
	16t	8"	BLUE	16000	12800	32000	22400	16000	
	20t	10"	ORANGE	20000	16000	40000	28000	20000	
	24t	12"	ORANGE	24000	19200	48000	33600	24000	



Steel Wire Rope Slings Load (Safety) Chart

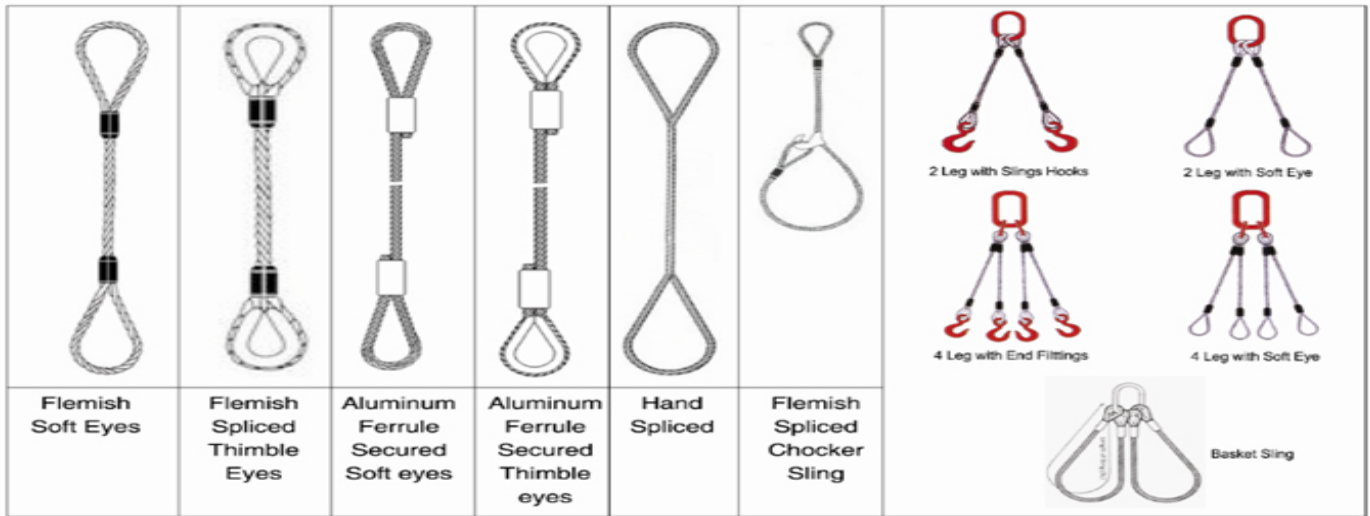

WORKING LOAD LIMITS IN- METRIC TON (t) FOR STANDARD STEEL WIRE ROPE SLINGS								
WIRE CONST:- 6X19+IWRC / 6X36+IWRC- SWL for Grade-EIPS(1960 TS)								
Rope Ø (inch)	Rope Ø (mm)	SINGLE LEG			2- LEG		4-LEG	
		VERTICAL	CHOKER	BASKET	0°-45°	45°-60°	0°-45°	45°-60°
		100%	80%	200%	MF: 1.4	MF:1	MF: 2.1	MF: 1.5
1/4"	6	0.60	0.48	1.2	0.84	0.60	1.26	0.9
5/16"	8	0.90	0.72	1.8	1.26	0.90	1.89	1.35
	9	1	0.8	2	1.40	1	2.1	1.5
3/8"	10	1.25	1	2.5	1.75	1.25	2.63	1.88
7/16"	11	1.70	1.36	3.4	2.38	1.70	3.57	2.55
	12	2.20	1.76	4.4	3.08	2.20	4.62	3.3
1/2"	13	2.30	1.84	4.6	3.22	2.30	4.83	3.45
9/16"	14	2.90	2.32	5.8	4.06	2.90	6.09	4.35
5/8"	16	3.30	2.64	6.6	4.62	3.30	6.93	4.95
	17	3.50	2.8	7	4.90	3.50	7.35	5.25
	18	4	3.20	8	5.60	4	8.4	6
3/4"	19	5	4	10	7	5	10.5	7.5
	20	5.30	4.24	10.6	7.42	5.30	11.13	7.95
7/8"	22	6.80	5.44	13.6	9.52	6.80	14.28	10.2
	24	7.60	6.08	15.2	10.64	7.60	15.96	11.4
1"	25	8.50	6.80	17	11.90	8.50	17.85	12.75
	26	8.90	7.12	17.8	12.46	8.90	18.69	13.35
1 1/8"	28	10	8	20	14	10	21	15
	30	11.70	9.36	23.4	16.38	11.70	24.57	17.55
1 1/4"	32	13	10.40	26	18.20	13	27.3	19.5
	34	14	11.20	28	19.60	14	29.4	21
1 3/8"	36	16	12.80	32	22.40	16	33.6	24
1 1/2"	38	18.50	14.80	37	25.90	18.50	38.85	27.75
1 5/8"	40	21.50	17.20	43	30.10	21.50	45.15	32.25
1-3/4	44	25	20	50	35	25	52.5	37.5
1 7/8	48	29	23.20	58	40.60	29	60.9	43.5
2"	52	33	26.40	66	46.20	33	69.3	49.5
2 1/4"	56	39	31.20	78	54.60	39	81.9	58.5
2 1/2"	64	50	40	100	70	50	105	75
3"	76	70	56	140	98	70	147	105